



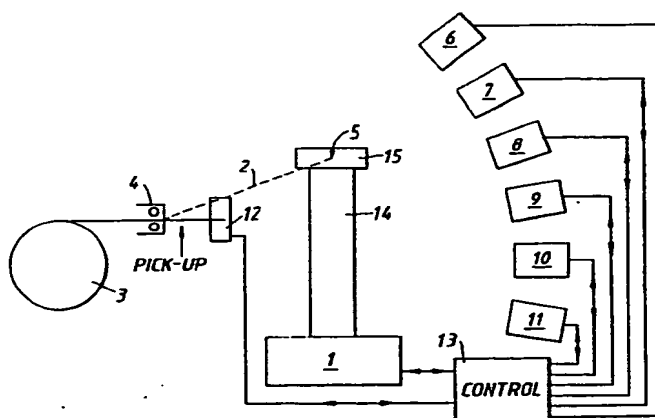

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : C03B 37/16	A1	(11) International Publication Number: WO 91/13837 (43) International Publication Date: 19 September 1991 (19.09.91)
<p>(21) International Application Number: PCT/GB91/00361</p> <p>(22) International Filing Date: 7 March 1991 (07.03.91)</p> <p>(30) Priority data: 9005189.7 8 March 1990 (08.03.90) GB</p> <p>(71) Applicant (for all designated States except US): BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY [GB/GB]; 81 Newgate Street, London EC1A 7AJ (GB).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): NICHOLLS, Simon, Thomas [GB/GB]; Jasmine, The Street, Earl Soham, Woodbridge, Suffolk IP13 7SA (GB). KELLETT, John, Greenleaf [GB/GB]; 8 Shears Court, West Mersea, Colchester, Essex CO5 8DB (GB). FULCHER, Adrian, Frederick [GB/GB]; 75 Sheldrake Drive, Ipswich, Suffolk IP2 9NP (GB).</p>		<p>(74) Agent: SKINNER, Vincent, Joseph; Intellectual Property Unit, British Telecom, 151 Gower Street, London WC1E 6BA (GB).</p> <p>(81) Designated States: AT (European patent), AU, BE (European patent), CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB, GB (European patent), GR (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent), US.</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>

(54) Title: OPTICAL FIBRE HANDLING

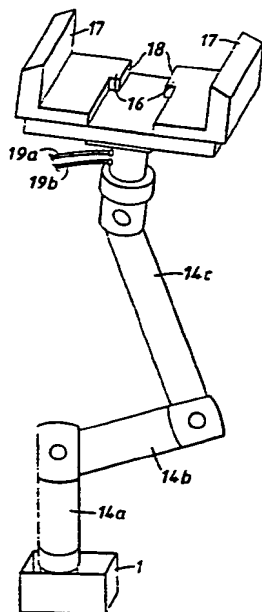

(57) Abstract

An automated optical fibre processing system in which a robot (1) conducts a fibre end to various workstations (7 to 11) where cutting, cleaving, cleaning, stripping and testing take place. To achieve exact fibre positioning during processing the fibre can be located in a cartridge at station (6) that provides a datum for operations on the fibre. The cartridge may be independent, part of the robot arm or part of a workstation. A control device (13) controls the take up of the fibre by the robot gripper (15) as well as movement to workstations and operations of the processes at the workstation.